

## Technical Data Sheet K Series

### Basic Info

| KSF K 60x800        | KSF K 42x650 | KSF K 34x550 |
|---------------------|--------------|--------------|
| Nominal length (mm) |              |              |
| 800                 | 650          | 550          |
| Weight (kg)         |              |              |
| 1,00                | 0,60         | 0,35         |
| Item number         |              |              |
| 22080               | 22065        | 22000        |

### Construction

- Material: PP-EPDM
- UV-stabilized
- Conical plastic shell with screw thread
- Surface matt black

### Applications



### Accessories




**Special Granulate**  
1500 g  
Item No. 21824



**Special Granulate**  
500 g  
Item No. 21823

## Technical Data

|                                | KSF K 60x800                               | KSF K 42x650    | KSF K 34x550 |
|--------------------------------|--|-----------------|--------------|
| <b>a</b> Length (mm)           | 800  | 650             | 550          |
| <b>b</b> Outer diameter (mm)   | 163  | 136             | 98           |
| <b>c</b> Diameter setting (mm) | 75   60x40 = Ø 72   70   60   48   42   34 | 48   42   34    | 42   34      |
| <b>d</b> Depth setting (mm)    | 425   470   480   575<br>640   660   690   | 455   500   530 | 325   400    |
| <b>e</b> Alignment range       | 3°   | 2,7°            | 2,5°         |

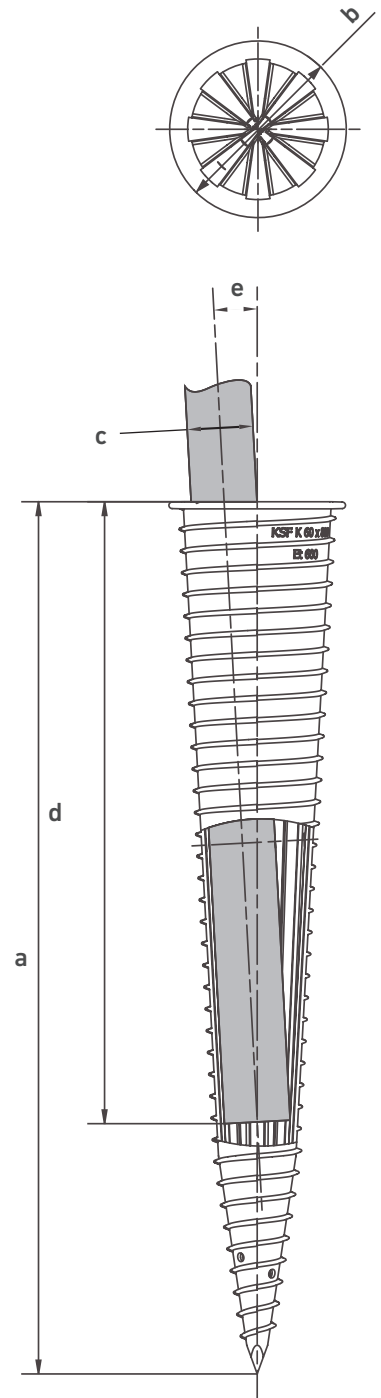

Subject to technical change!

**Krinner Schraubfundamente GmbH** | Passauer Straße 55 | D-94342 Straßkirchen  
 Phone: +49 9424 9401-80 | E-Mail: service@krinner.com | www.krinner.io