

Technical Data Sheet E Series

Basic Info

KSF E 89x1000-E60	KSF E 89x800-E60	KSF E 89x550-E60
Nominal length (mm)		
1000	800	550
Tube diameter (mm)		
88,90	88,90	88,90
Weight (kg)		
5,50	4,30	3,50
Item number		
24100	24080	24055




KSF E 89x800-E60

Construction

- Coating: Hot-dip galvanized according to DIN EN ISO 1461
- Continuous welded helix
- Patented conical body forged from a single piece of tubing

Applications

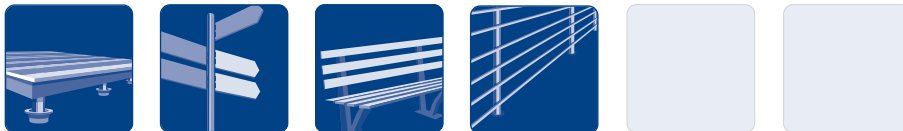

Accessories



Cover Plate 2 mm-E60
Item No. 24808



Clamp Ring-E60
Item No. 24802



Excenter-E60
Item No. 24801



Fair Level-E60
Item No. 24803



Excenter Set-E60
Item No. 24817



Fixing Screw-E60
Item No. 21808



Subject to technical change!

Krinner Schraubfundamente GmbH | Passauer Straße 55 | D-94342 Straßkirchen
Phone: +49 9424 9401-80 | E-Mail: service@krinner.com | www.krinner.io

sustainable · durable · revolutionary

Technical Data

	KSF E 89x1000-E60	KSF E 89x800-E60	KSF E 89x550-E60
a	Length (mm) (± 25 mm)		
	1000	800	550
b	Outer diameter (mm)		
	88,90	88,90	88,90
c	Inner diameter (mm)		
	81,70	81,70	81,70
d	Diameter setting* (mm)		
	60	60	60
e	Depth setting (mm) (± 25 mm)		
	270	270	270
f	Alignment range		
	3° (incl. Excenter)	3° (incl. Excenter)	3° (incl. Excenter)
g	Thread		
	3 x M8	3 x M8	3 x M8
h	Pitch circle diameter (mm)		
	118	118	118
i	Flange outer diameter (mm)		
	136	136	136
j	Flange thickness (mm)		
	3	3	3

*Diameter setting (d) results in depth setting (e) and alignment range (f)

