

## Technical Datasheet G Series

### Basic Info


KSFG89x1300-4xM12    KSFG89x1000-4xM12    KSFG89x800-4xM12

Nominal length (mm)		
1300	1000	800
Tube diameter (mm)		
88,90	88,90	88,90
Weight (kg)		
7,80	6,60	5,80
Item number		
24207	24206	24205

### Construction

- Nut: DIN EN ISO 4032-8
- Continuous welded helix
- Coating: Hot dip galvanized according to DIN EN ISO 1461

### Applications

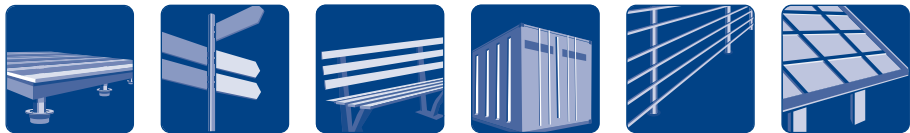

### Accessories



**Special Granulate**  
1500g  
Item No. 21824



**Special Granulate**  
500g  
Item No. 21823



**Screwing Bar long**  
2400g  
Item No. 24805





KSFG 89x  
1300-4xM12



## Technical Data

	KSFG89x1300-4xM12	KSFG89x1000-4xM12	KSFG89x800-4xM12
<b>a</b>	<b>Length (mm) (<math>\pm 25</math> mm)</b>		
	1280	1080	830
<b>b</b>	<b>Shaft outer diameter (mm)</b>		
	88,90	88,90	88,90
<b>c</b>	<b>Inner diameter (mm)</b>		
	83,70	83,70	83,70
<b>d</b>	<b>Diameter setting (mm)</b>		
	76   40x60   60   48	76   40x60   60   48	76   40x60   60   48
<b>e</b>	<b>Depth setting (mm) (<math>\pm 25</math> mm)</b>		
	970   1020   1055   1090	780   830   855   900	520   570   600   640
<b>f</b>	<b>Thread</b>		
	4 x M12	4 x M12	4 x M12

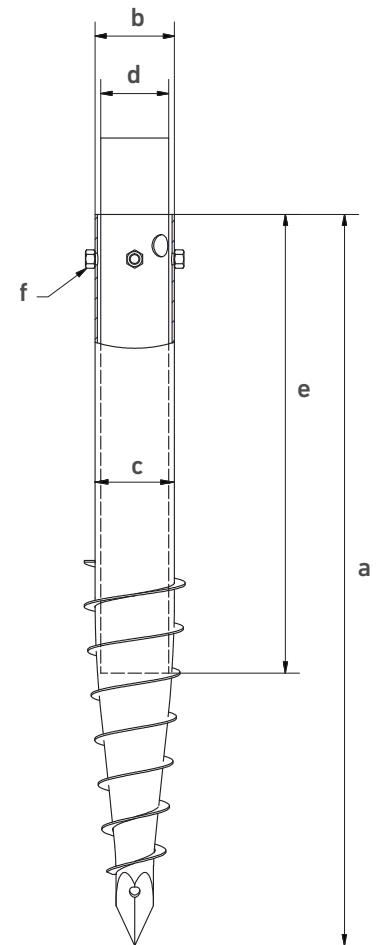

Subject to technical change!

**Krinner Schraubfundamente GmbH** | Passauer Straße 55 | D-94342 Straßkirchen  
 Phone: +49 9424 9401-80 | E-Mail: service@krinner.com | www.krinner.io